


SUPER-CORD

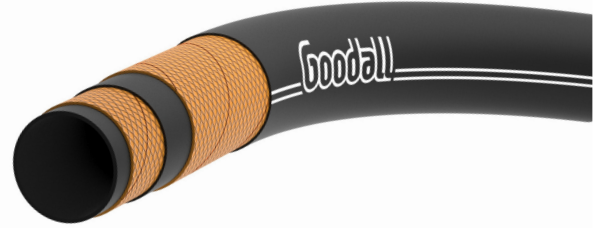

APPLICATION :

- Extra heavy duty water hose for tough applications in industry, agriculture and construction sites
- Suitable for oil-laden air

TEMPERATURE RANGE :

- -30°C to +85°C

BURST PRESSURE:

- 3:1

MATERIAL TUBE :

- Black, smooth synthetic NBR/SBR rubber
- Suitable for oil-laden air

REINFORCEMENTS :

- High tensile, spiral-plied textile cords

MATERIAL COVER :

- Black, synthetic CR rubber compound
- Smooth with cloth impression
- Weather and ozone resistant

BRANDING:

- White longitudinal Mylar stripe: GOODALL SUPER-CORD - WATER 30BAR
- Embossed strip: GOODALL SUPER-CORD – water – 30 bar WP

STANDARD LENGTHS:

- 40 meter

SUPER-CORD

ID	OD	maximum working pressure	minimum burst pressure	minimum bend radius	weight
mm	mm	bar	bar	mm	kg/m
13	21	30	90	117	0,29
16	24	30	90	150	0,36
19	28	30	90	175	0,48
25	35	30	90	230	0,61
32	48	30	90	288	1,39
38	56	30	90	342	1,80

Size tolerances according ISO1307 All data at 68°F/20°C

Goodall SUPER-CORD • WATER 30 BAR 